

### SG-UAV2035N

# - 2 Megapixel 35x Zoom Starlight Drone Camera with Gimbal



#### 1. Features

- > 1/2" 2 Megapixel COMS Sensor.
- > Powerful 35x optical zoom (6mm~210mm), 4x Digital Zoom.
- > Max. 2Mp(1920x1080) Resolution
- > Support various IVS functions
- > Support Optical Defog, Electronic Image Stabilization
- > 3-Axis stabilized Pan-Tilt, High precision: 0.008°
- > Support GPS info Overlay.
- > Support smart Auto-Tracking
- > Quick Assembly and Disassembly, Open SDK.

# 2. Specification


| Model            |                      | SG-UAV2035N              |
|------------------|----------------------|--------------------------|
| Sensor           | Image Sensor         | 1/2" CMOS                |
|                  | Effective Pixels     | Approx. 2.13 Megapixel   |
|                  | Max. Resolution      | 1945(H)x1225(V)          |
| Lens             | Focal Length         | 6mm~210mm                |
|                  | Optical Zoom         | 35x                      |
|                  | Aperture             | F1.5~F4.8                |
|                  | Close Focus Distance | 0.1m~1.5m (Wide ~ Tale)  |
|                  | Angle of View        | 61°~2.0°                 |
| Video<br>Network | Compression          | H.265/H.264/H.264H/MJPEG |
|                  | Video/Photo Format   | MP4/JPEG.                |
|                  | Storage Capabilities | TF card, up to 128G      |

Savvy & Good www.savgood.com




|                                | Network Protocol | Onvif, GB28181, HTTP, RTSP, RTP, TCP, UDP  |
|--------------------------------|------------------|--|
| Resolution                     | Network Output   | 50Hz: 25fps@2Mp(1920×1080), 60Hz: 30fps@2Mp(1920×1080)   |
| IVS                            |                  | Tripwire, Cross Fence Detection, Intrusion, Abandoned Object, Fast-Moving, Parking Detection, Crowd Gathering Estimation, Missing Object, Loitering Detection. |
| Minimum Illumination           |                  | Color: 0.001Lux/F1.5; B/W: 0.0001Lux/F1.5  |
| Defog                          |                  | Electronic Defog + Optical Defog(Default ON).  |
| Digital Zoom                   |                  | 4x   |
| Electronic Image Stabilization |                  | Support  |
| One Key to 1x Image            |                  | Support  |
| Pan-Tilt Gin                   | nbal             |  |
| Angular Vibration Range        |                  | ±0.008°  |
| Mount                          |                  | Detachable   |
| Controllable Range             |                  | Pitch: +70°~-90°, Yaw: ±160°   |
| Mechanical Range               |                  | Pitch: +75°~-100°, Yaw: ±175°, Roll:+90°~-50°  |
| Max. Control Speed             |                  | Pitch: ±120°/s, Yaw: ±180°/s   |
| Auto-tracking                  |                  | Support  |
| Conditions                     |                  |  |
| Operating Conditions           |                  | (-10°C~+60°C/20% to 80%RH)   |
| Storage Conditions             |                  | (-20°C~+70°C/20% to 95%RH)   |
| Power Supply                   |                  | DC 12V~25V   |
| Power Consumption              |                  | 8.4W   |
| Dimensions(L*W*H)              |                  | Approx. 175mm*100mm*162mm  |
| Weight                         |                  | Approx. 842g   |

# 3. Dimension

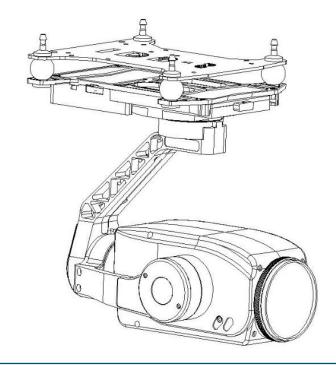

Savvy & Good www.savgood.com



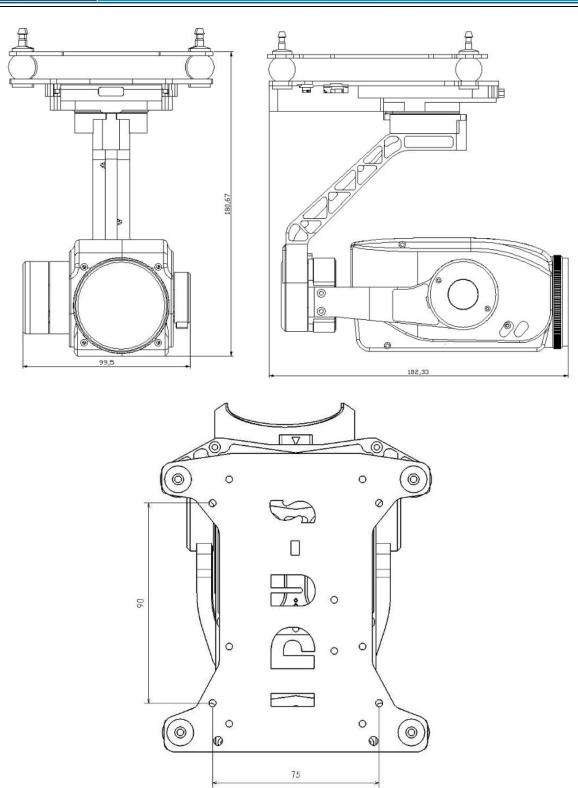

#### Hangzhou Savgood Technology Co., Ltd.

Rm. 701, Xincheng Fazhan Building #1, No. 406 Xintiandi Street, Xiacheng District, Hangzhou City, 310004, China Tel: +86 - (571) 8803 8121

Email: sales@savgood.com http://www.savgood.com

\*Design and specifications are subject to change without prior notification. © 2013 Savgood Technology Co., Ltd.

Savvy & Good www.savgood.com