

SG-ZCM8030NS

- 4K/8Megapixel 30x Zoom Network Camera Module



1. Features


- > 1/1.8" Sony Exmor CMOS Sensor.
- > Powerful 30x optical zoom (6~180mm).
- > Max. 8Mp(3840x2160) Resolution
- > Support various IVS functions
- > Support Electronic Defog
- > Support video output from the network port.
- > **With SigmaStar high performance chip.**

2. Specification


| Model | | SG-ZCM8030NS | | | |
|--------|-----------------------|--|---------|-----------|----------|
| Sensor | Image Sensor | 1/1.8" Sony Starvis progressive scan CMOS | | | |
| | Effective Pixels | Approx. 8.42 Megapixel | | | |
| Lens | Focal Length | 6mm~180mm, 30x Optical Zoom | | | |
| | Aperture | F1.5~F4.3 | | | |
| | Field of View | H: 65.2°~2.4°, V: 39.5°~1.3°, D: 72.5°~2.8° | | | |
| | Close Focus Distance | 1m~2m (Wide~Tele) | | | |
| | Zoom Speed | Approx. 3.5s (Optical Wide~Tele) | | | |
| | DORI Distance (Human) | Detect | Observe | Recognize | Identify |
| | 3,666m | 1,454m | 733m | 366m | |
| Video | Compression | H.265/H.264/H.264H/MJPEG | | | |
| | Streaming Capability | 3 streams | | | |
| | Resolution | 50Hz: 25fps@8Mp(3840×2160) 60Hz: 30fps@8Mp(3840×2160) | | | |
| | Video Bit Rate | 32kbps~16Mbps | | | |

| | | |
|------------------------|------------------|--|
| | Audio | AAC / MP2L2 |
| Network | Storage | TF card (256 GB), FTP, NAS |
| | Network Protocol | Onvif, HTTP, HTTPS, IPv4, IPv6, RTSP, DDNS, RTP, TCP, UDP |
| | Multicast | Support |
| General Events | | Motion, Tamper, SD Card, Network |
| IVS | | Tripwire, Cross Fence Detection, Intrusion, Abandoned Object, Fast-Moving, Parking Detection, Crowd Gathering Estimation, Missing Object, Loitering Detection. |
| S/N Ratio | | ≥55dB (AGC Off, Weight ON) |
| Minimum Illumination | | Color: 0.01Lux/F1.5; B/W: 0.001Lux/F1.5 |
| Noise Reduction | | 2D/3D |
| Exposure Mode | | Auto, Aperture Priority, Shutter Priority, Gain Priority, Manual |
| Exposure Compensation | | Support |
| Shutter Speed | | 1/1~1/30000s |
| BLC | | Support |
| HLC | | Support |
| WDR | | Support |
| White Balance | | Auto, Manual, Indoor, Outdoor, ATW, Sodium lamp, Street lamp, Natural, One Push |
| Day/Night | | Electrical, ICR(Auto/Manual) |
| Focus Mode | | Auto, Manual, Semi Auto, Fast Auto, Fast Semi Auto, One Push AF |
| Electronic Defog | | Support |
| Flip | | Support |
| EIS | | Support |
| Digital Zoom | | 16x |
| External Control | | TTL |
| Interface | | 4pin Ethernet port, 6pin Power & UART port, 5pin Audio port. |
| Communication Protocol | | SONY VISCA, Pleco D/P |
| Operating Conditions | | (-30°C~+60°C/20% to 80%RH) |
| Storage Conditions | | (-40°C~+70°C/20% to 95%RH) |
| Power Supply | | DC 12V |
| Power Consumption | | Static power: 4.5W, Sports power: 5.5W |
| Dimensions(L*W*H) | | 126mm*54mm*68mm |
| Weight | | 410g |

3. Dimension

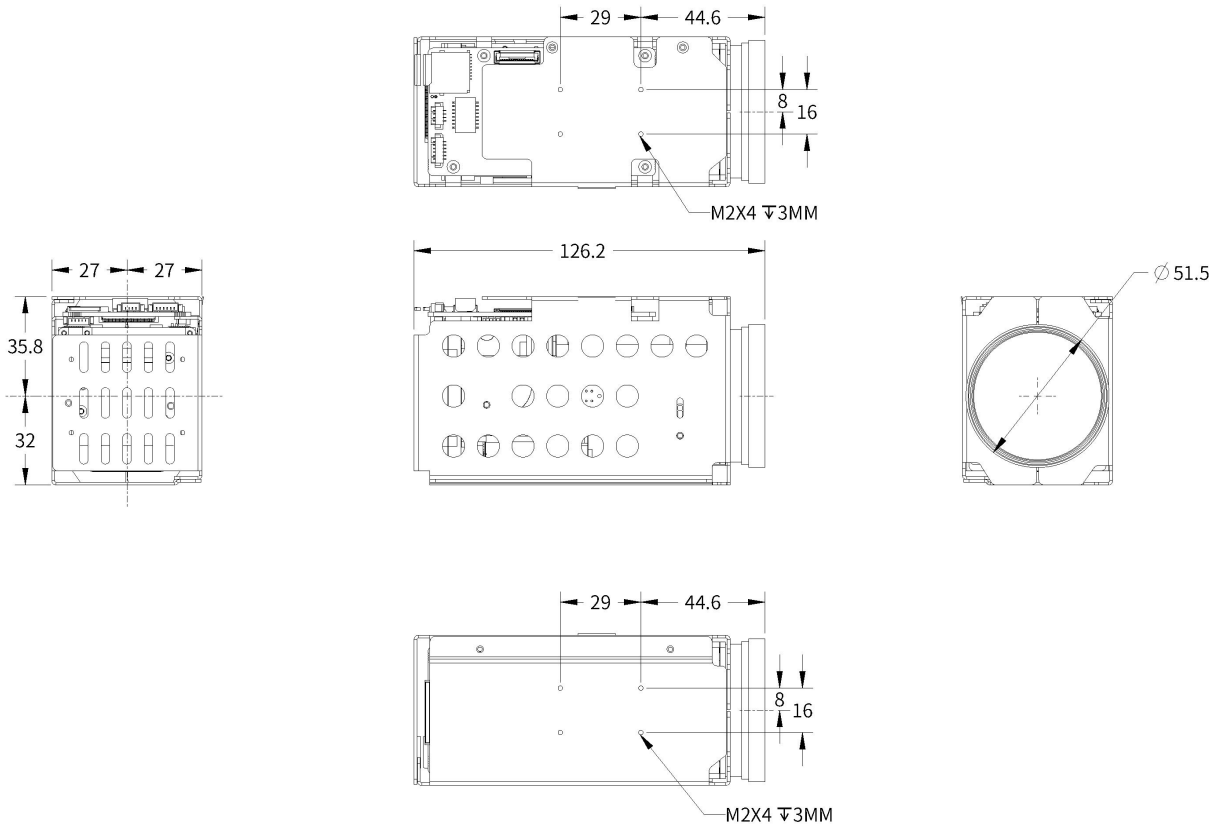

4. Interface Definition

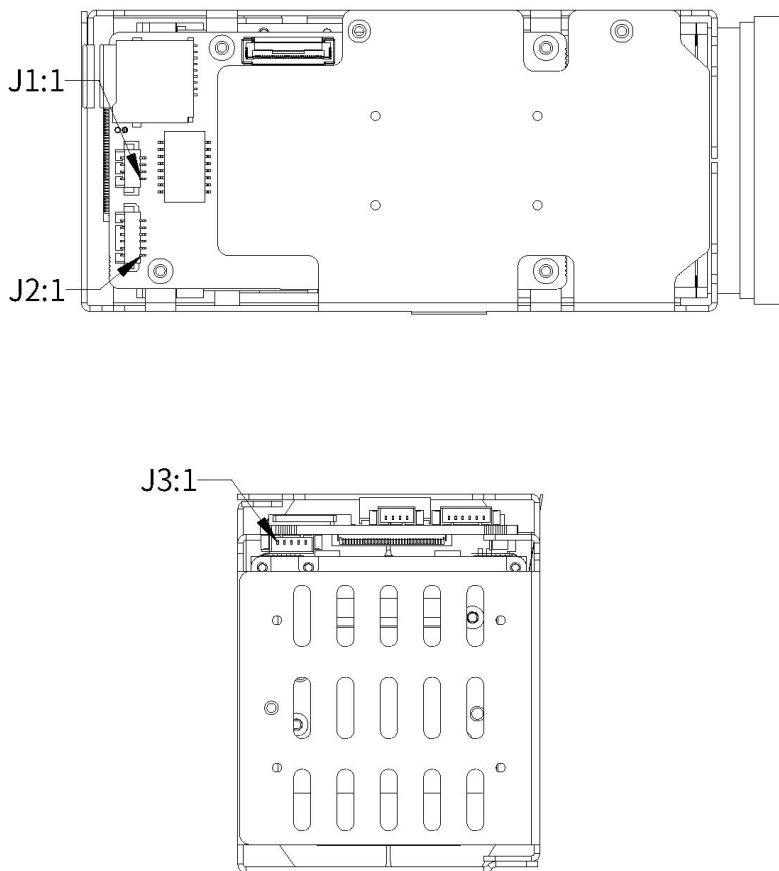

Network Interface

| Type | PIN Number | PIN Name | Description |
|--------------------------------|------------|-----------|--------------------------------------|
| J1_4pin Ethernet Interface | 1 | ETHRX- | Adaptive Ethernet port, Internet RX- |
| | 2 | ETHRX+ | Adaptive Ethernet port, Internet RX+ |
| | 3 | ETHTX- | Adaptive Ethernet port, Internet TX- |
| | 4 | ETHTX+ | Adaptive Ethernet port, Internet TX+ |
| J2_6pin Power & UART Interface | 1 | DC_IN | DC12V |
| | 2 | GND | GND |
| | 3 | RXD1 | TTL Level 3.3V, Pelco Protocol |
| | 4 | TXD1 | TTL Level 3.3V, Pelco Protocol |
| | 5 | RXD0 | TTL Level 3.3V, Visca Protocol |
| | 6 | TXD0 | TTL Level 3.3V, Visca Protocol |
| J3_5pin Audio Interface | 1 | AUDIO_OUT | Audio Out (Line Out) |
| | 2 | GND | GND |
| | 3 | AUDIO_IN | Audio In (Line In) |
| | 4 | GND | GND |
| | 5 | NC | NC |

Hangzhou Savgood Technology Co., Ltd.

Rm. 701, Xincheng Fazhan Building #1, No. 406 Xintiandi Street,
Xiacheng District, Hangzhou City, 310004, China

Tel: +86 - (571) 8803 8121

Email: sales@savgood.com

<http://www.savgood.com>

<http://www.savgoodtech.com>

*Design and specifications are subject to change without prior notification.

© 2013 Savgood Technology Co., Ltd.